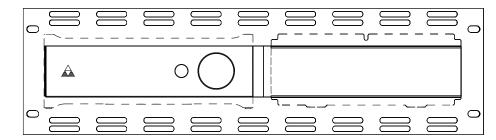## INTRODUCTION

The Triad SA1 Streaming Amplifier Rack Mount is intended for use with one or two Triad SA1 Streaming Amplifiers and provides easy installation in an equipment rack. The rack mount has a custom faceplate designed for a professional presentation, and includes a blank plate that can be put in place when only one Triad SA1 is installed. The rear edge of the shelf also includes a lacing bar for convenient cable management.
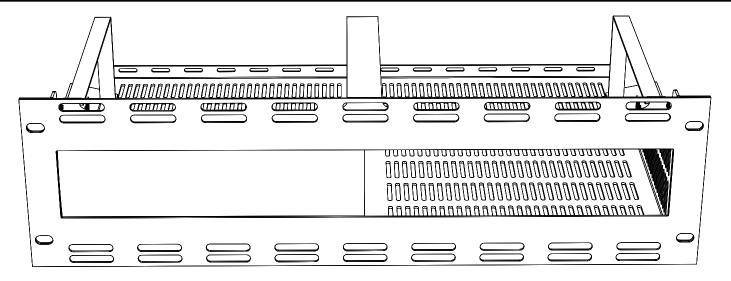
SUPPORTED MODELS

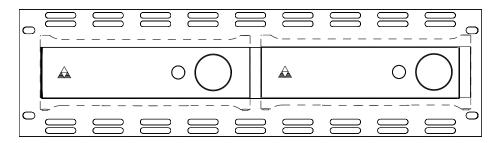- Triad SA1 Streaming Amplifier Rack Mount, Black (TS-SA1RM-BL)

INSTALLING ONE TRIAD SA1 STREAMING AMPLIFIER IN THE RACK MOUNT

1 Position the Triad SA1 to the far left (or right) of the rack shelf, and then push it forward, so that the front meets the cutout in the faceplate.

2 Install the top clamp over the Triad SA1, making sure to align the screw holes in the front and threaded stud notches in the back.

3 Install the two supplied screws on the front left and right.

4 Attach the three supplied nuts to the three threaded studs on the back.

5 Install the blank insert on the side with no Triad SA1, then attach a single nut to the threaded stud on the inside of the mount.

6 Install the full assembly into the equipment rack.

INSTALLING TWO TRIAD SA1 STREAMING AMPLIFIERS IN THE RACK MOUNT

1 Position the first Triad SA1 to the far left of the rack shelf, and then push it forward, so that the front meets the cutout in the faceplate.

2 Position the second Triad SA1 to the far right of the rack shelf and then push it forward to align with the first Triad SA1 unit.

3 Install the top clamp over the top of both units, making sure to align the screw holes in the front and threaded stud notches in the back.

4 Install the two supplied screws on the front left and right.

5 Attach the three supplied nuts to the three bolts on the back left, center, and right.

6 Install the full assembly into the equipment rack.

REGULATORY/SAFETY INFORMATION

To review regulatory information for your particular Triad products, see the information located on the Triad website at triadspkrs.co/reg.

WARRANTY

Limited 2 Year Warranty. Visit triadspkrs.co/warranty for details.

MORE HELP

For the latest version of this document and to view additional materials, open the URL below or scan the QR code on a device that can view PDFs.

MOST RECENT VERSION

triadspkrs.co/triadsa1-rmk

MORE INFORMATION ON TRIAD SA1

triadspkrs.co/sa1

TRIAD