



SE-8, SE-8i

8-port Unmanaged Gigabit Switch



QUICK START GUIDE



Switch overview

The Pakedge SE-8 and SE-8i are affordable network solutions that deliver high performance and versatility to your home or office networks. These deliver eight ports of gigabit speed and reliability to your basic connected devices and heavy bandwidth applications, including on-demand streaming, video over IP, and IP camera systems.

Specifications:

Input power	100-240VAC 50-60 Hz
Power supply	9V 600mA (SE-8i includes universal power adapter)
Switching capacity	16 Gbps
Forwarding rate	11.9 Mpps
LEDs	1× Power, 8× Link/Act
MAC address table	4K
Interface	8× rear-facing 10/100/1000 Mbps auto-negotiation RJ45 ports (auto MDI/MDIX)
Standards	IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3ab
Dimensions (L×W×H)	5.59 × 3.54 × 0.87 in. (142 × 90 × 22.39 mm)
Transfer Method	Store and forward
MAC address learning	Automatically updated
Operational temperature	32°F - 113°F (0°C - 45°C)
Storage temperature	-40°F - 158°F (-40°C - 70°C)
Humidity	10% to 90% RH, non-condensing


Features

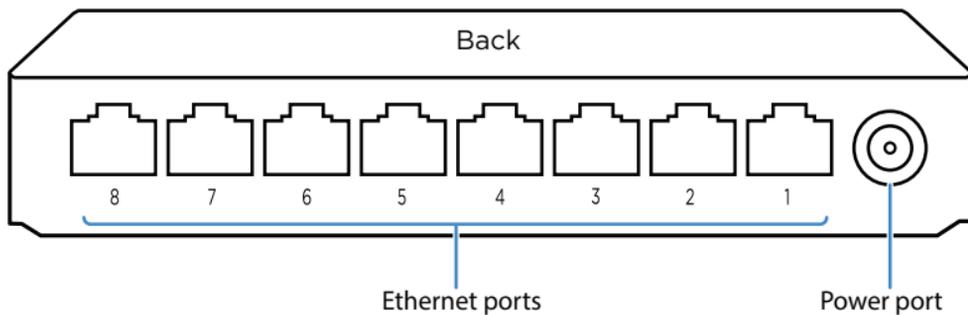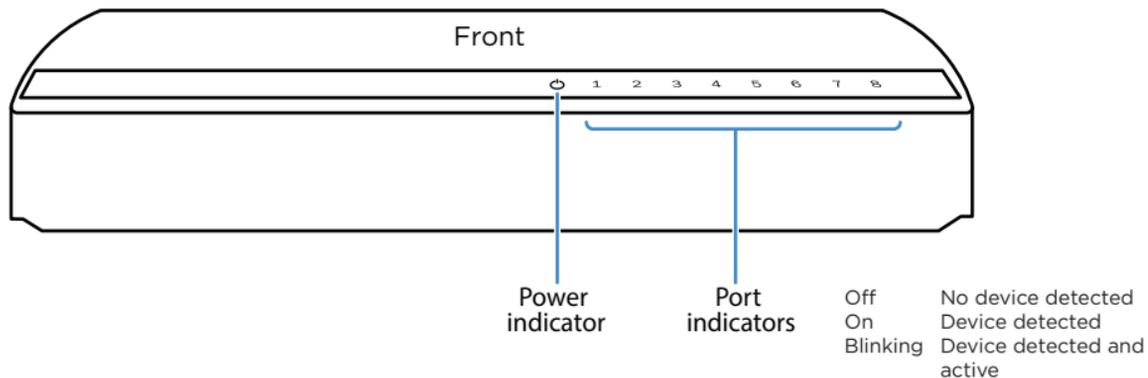

Mounting to a wall or cabinet


- 1** Place the template at the desired mounting location, then mark the location of the mounting points. The distance between the centerlines of the two mounting points should be $4 \frac{3}{32}$ in. (104 mm).
- 2** Install drywall anchors (not included), if needed, at marked locations, then install the screws into the same locations. Make sure you leave at least a $\frac{9}{64}$ in. (3.5 mm) gap between the top of the screw head and wall.
- 3** Line the keyholes on the bottom of the switch with the drywall screws, and hook the switch onto the drywall screws.

Wall mount template

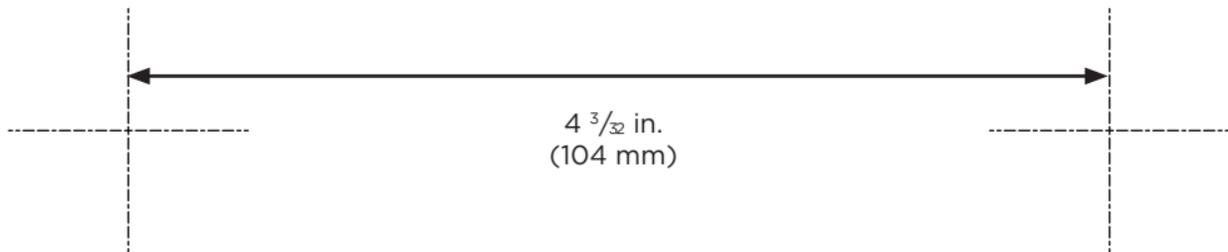


Applications

As a primary switch

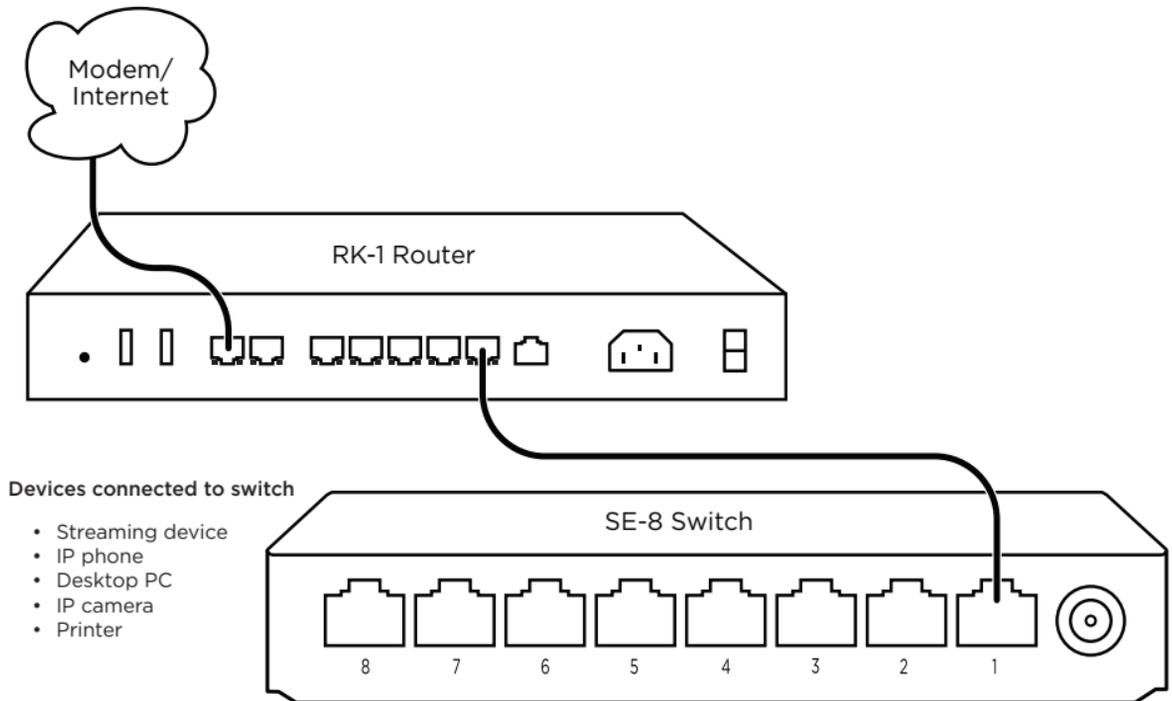

As an edge switch

Example: Connect an IP camera system to the SE-8 or SE-8i

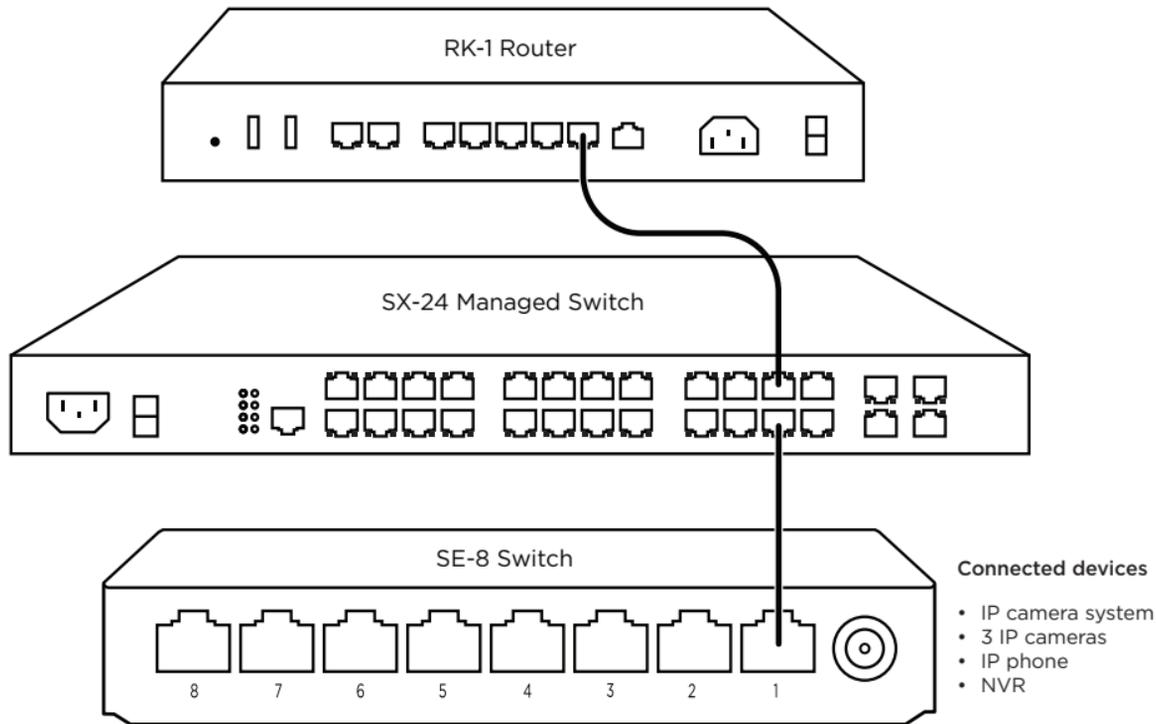

Technical Support

For technical help:
www.pakedge.com/portal
support@pakedge.com
(650) 385-8703

For non-technical inquiries:
customerservice@pakedge.com
(650) 385-8701

For regulatory information:
www.pakedge.com/regulatory



11734 S. Election Road
Draper, UT 84020

www.pakedge.com
sales@pakedge.com
©2017 Control4. All rights reserved.



DOC-00291-B 2017-07-21 MS