

CONTROL4® VIBRANT

PERFORMANCE FULLY TUNABLE LINEAR LIGHT



CONTROL4 VIBRANT PERFORMANCE FULLY TUNABLE LINEAR LIGHT


C4-LP-FT-16

Give your customers the beauty of natural lighting inside their property with Vibrant Fully Tunable White Linear Light. Utilizing a 3-diode design that enables white light color blending from a warm glow of 1800K up to 6000K daylight, this natural solution reduces stress, increases comfort, and creates an enjoyable natural environment for any application and at any time of day.


- Dynamic wide range color tuning capabilities
- Side by side three diode configuration for even color blending
- Color tuning from 1800K up to 6000K CCT
- Lumen output ranging up to 411 Lumens per foot
- Measures 10 mm wide and is cuttable every 2.46" (62 mm) with 16.4 ft max run
- Easy installation featuring 3M VHB adhesive backing
- IP54 rating featuring a nano-coating protective layer
- Control for color change and dimming via DMX/DALI (requires Creative Lighting Gateway) or Zigbee (requires Axxess DCM module)
- cULus Listed for indoor dry/damp locations
- 50,000 hours rated life

CONTROL4® PERFORMANCE FULLY TUNABLE LINEAR LIGHT

QUICK LOOK

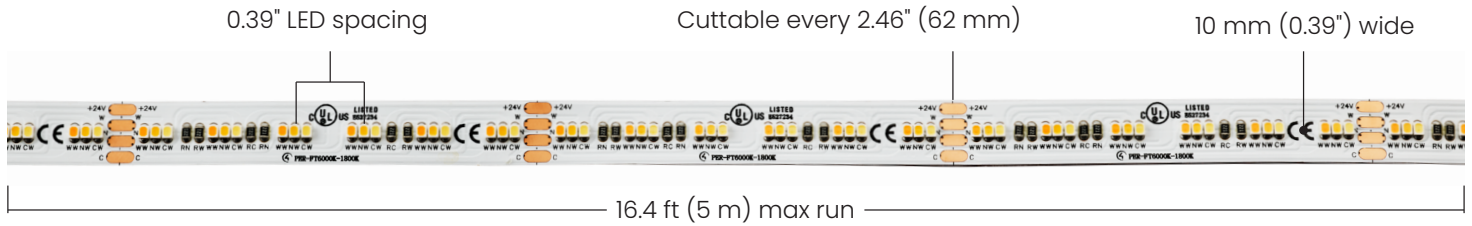

QUICK CONNECTION

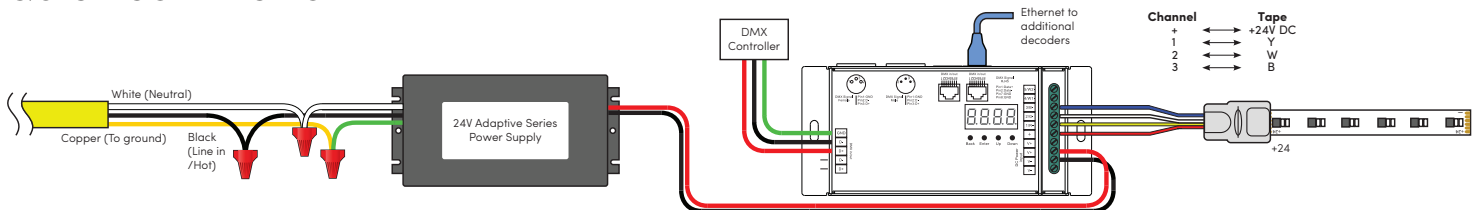

SPECIFICATIONS

Model number	C4-LP-FT-16
Power requirements	24V DC
Wattage	5.9W / ft (0.3 m)
Lumens	Up to 410 Lm / ft (0.3 m)
Max run	16.4 ft (5 m)
Color temperature	Tunable from 1800K to 6000K
CRI	90+
Beam angle	120°
Tape size	0.39" (10 mm) W × 0.06" (1.65 mm) H
Cutting increment	2.46" (62 mm)
Control method	24V power supply with DMX controller and decoder
Dimming compatibility	TRIAC / ELV (5 - 100%) with DMX controller and decoder
Operational temperature	-20° C to 45° C (4° F to 113° F)
Humidity	5% to 95% non-condensing
Storage	-20° C to 45° C (4° F to 113° F)
IP rating	IP54 suited for indoor dry and damp locations

Included accessories


Four-Wire Connector Block with Lead	3 (C4-LCH5-4WL)
Four-Wire Jumper with Connector Blocks	3
Emery Board	1

MORE INFO ON VIBRANT LIGHTING



ctrl4.co/vibrant

INSTALLATION GUIDE



ctrl4.co/vibrant-fullytunable-ig